

#### WSTD6050AN-FRL

## Smart High-Side Power Switch Dual Channel, 38mΩ, DFN9×6-14L, AEC-Q100 qualified

## **Application**

- ◆ Suitable for resistive, inductive and capacitive loads
- ◆ Replaces electromechanical relays, fuses and discrete circuits
- ♦ Most suitable for loads with high inrush current, such as lamps
- ♦ Suitable for 12 V and 24 V trucks + trailer and transportation systems

#### **Basic Features**

- ◆ Dual channel device
- ◆ Very low stand-by current
- ◆ 3.3 V and 5 V compatible logic inputs
- ◆ Optimized electromagnetic compatibility
- Very low electromagnetic susceptibility
- Can be used for PWM frequencies up to 2 kHz
- ◆ Self-recovery mode in fault condition
- User adjustable current limitation

## **Diagnostic Functions**

- Proportional load current sense
- ◆ High current sense precision for wide range currents
- Off-state open load detection
- OUT short to VS detection
- ♦ Very low current sense leakage

### **Protection Functions**

- Undervoltage shutdown
- ◆ Overvoltage clamp
- ◆ Load current limitation
- Self limiting of fast thermal transients
- Protection against loss of ground and loss of VS
- ◆ Thermal shutdown
- ♦ Electrostatic discharge protection

# **Product Summary**

Parameter	Symbol	Value
Max. transient supply voltage	Vs	60V
Operating voltage range	V <sub>NOM</sub>	8-36V
On-state resistance (per channel, T <sub>j</sub> = 25°C)	Ron	38mΩ
Nominal load current (one channel active, $T_j = 25^{\circ}C$ )	I <sub>L(NOM)1</sub>	7A
Nominal load current (All channels active, $T_j = 25^{\circ}C$ )	I <sub>L(NOM)2</sub>	5A
Typical current sense ratio (I <sub>OUT</sub> =2A)	К	1640
Current limitation	I <sub>LIMH</sub>	Adjustable
Supply current in sleep	I <sub>SLEEP</sub>	3uA












WINSEMI MICROELECTRONICS WINSEMI W



# **Typical Application Circuit**

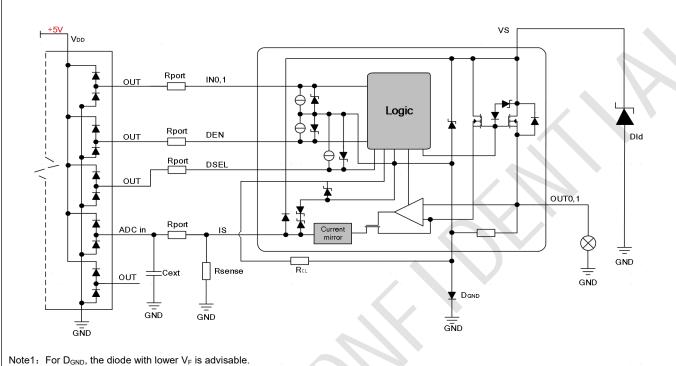

WINSEMI MICROELECTRONICS WINSEMI MICROELECTRONICS WINSEMI MICROELECTRONICS WINSEMI MICROELECTRONICS WINSEMI MICROELECTRONICS www.winsemi.com Tel: 0755-82506288 Fax: 0755-82506299 2/15 A0