

WST5008AK**Smart High-Side Power Switch Single Channel, 8mΩ, PLP7×4-6 , AEC-Q100 qualified****Application**

- ◆ Suitable for resistive, inductive and capacitive loads
- ◆ Replaces electromechanical relays, fuses and discrete circuits
- ◆ Most suitable for loads with high inrush current, such as lamps
- ◆ Suitable for 24 V and 48 V trucks + trailer and transportation systems

Features

- ◆ PRO-SIL™ ISO 26262-ready for supporting the integrator in evaluation of hardware element according to ISO 26262:2018 Clause 8-13
- ◆ Single channel device
- ◆ Very low stand-by current
- ◆ 3.3 V and 5 V compatible logic inputs
- ◆ Optimized electromagnetic compatibility
- ◆ Very low electromagnetic susceptibility

Diagnostic Functions


- ◆ Proportional load current sense
- ◆ High current sense precision for wide range currents
- ◆ Off-state open load detection
- ◆ OUT short to VS detection
- ◆ Overload and short to ground latch-off
- ◆ Thermal shutdown latch-off
- ◆ Very low current sense leakage

Protection Functions

- ◆ Undervoltage shutdown
- ◆ Overvoltage clamp
- ◆ Load current limitation
- ◆ Self limiting of fast thermal transients
- ◆ Protection against loss of ground and loss of VS
- ◆ Thermal shutdown

Product Summary

Parameter	Symbol	Value
Max. transient supply voltage($T_j \geq 25^\circ\text{C}$)	V_s	70V
Operating voltage range	V_{NOM}	5-58V
On-state resistance ($T_j = 25^\circ\text{C}$)	R_{ON}	8mΩ
Nominal load current ($T_j = 25^\circ\text{C}$)	$I_{\text{L(NOM)}}$	15A
Typical current sense ratio ($I_{\text{OUT}}=4\text{A}$)	K	5300
Current limitation	I_{LIMH}	50A
Supply current in sleep	I_{SLEEP}	5μA

Package	PLP7×4-6
Marking	WST5008AK
	




RoHS

ISO 26262
ready

Halogen-free

Typical Application Circuit

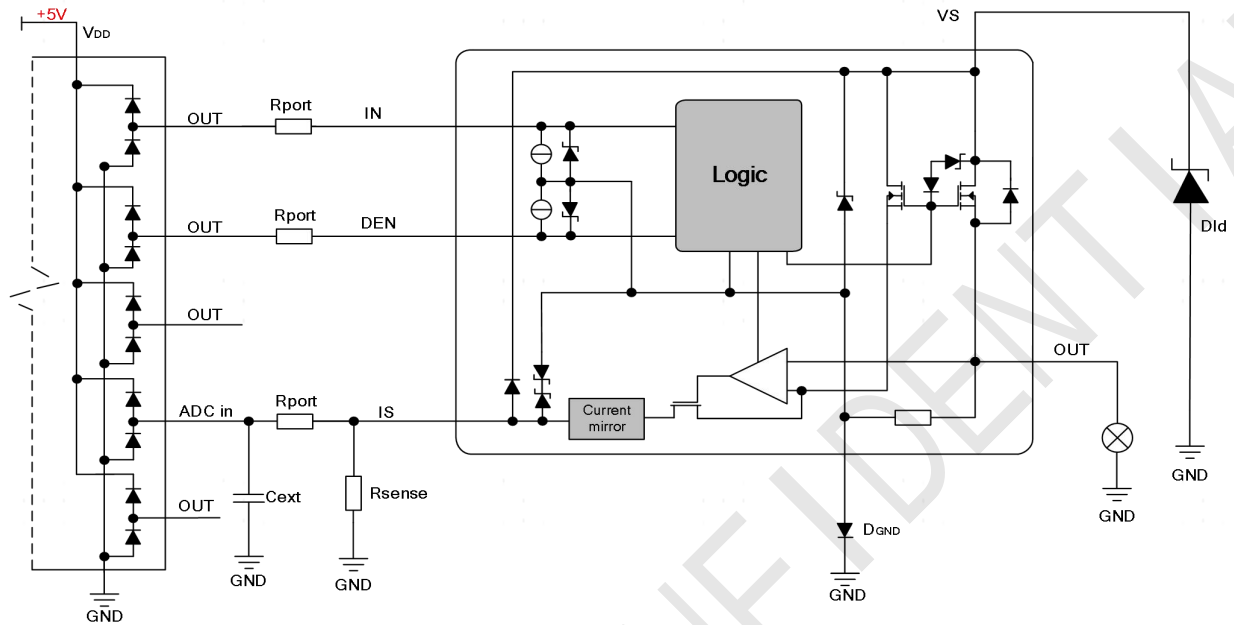


Note1: For D_{GND}, the diode with lower V_F is advisable.

Ordering Information

Package	Top Mark	Part No.
PLP7×4-6, Pb-free	WST5008AK XXYMX	WST5008AK

Pin Configuration

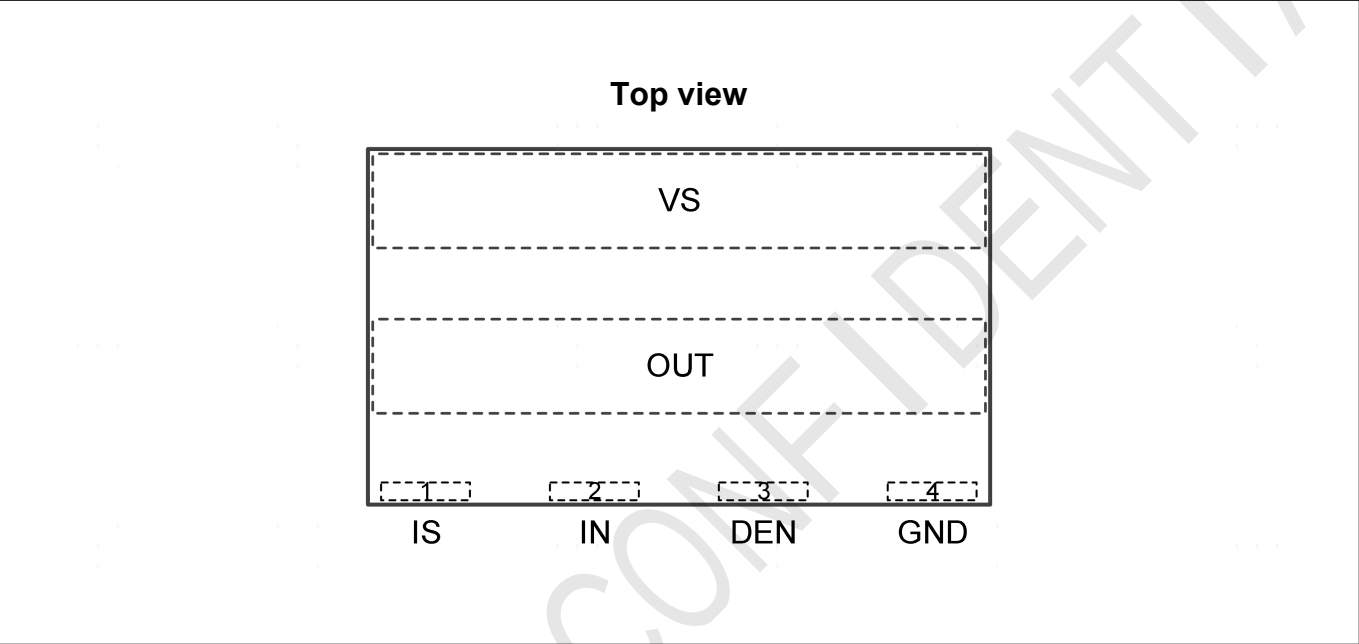

Pin Description


Pin Name	Pin NO.	Pin Description
IS	1	Multiplexed analog sense output pin; it delivers a current proportional to the selected diagnostic: load current.
IN	2	Voltage controlled input pin with hysteresis, compatible with 3 V and 5 V CMOS outputs. It controls output switch state.
DEN	3	Active high compatible with 3 V and 5 V CMOS outputs pin; it enables the IS diagnostic pin.
GND	4	Ground connection. Must be reverse battery protected by an external diode.
OUT	5	Power outputs.
VS	6	Battery connection.

Table 1. Suggested connections for unused and not connected pins

Connection / pin	IS	OUT	IN	DEN
Floating	Not allowed	X ⁽¹⁾	X	X
To ground	Through 1.0K resistor	Not allowed	Through 15K resistor	Through 15K resistor

Note2: X do not care.

Current and Voltage Conventions

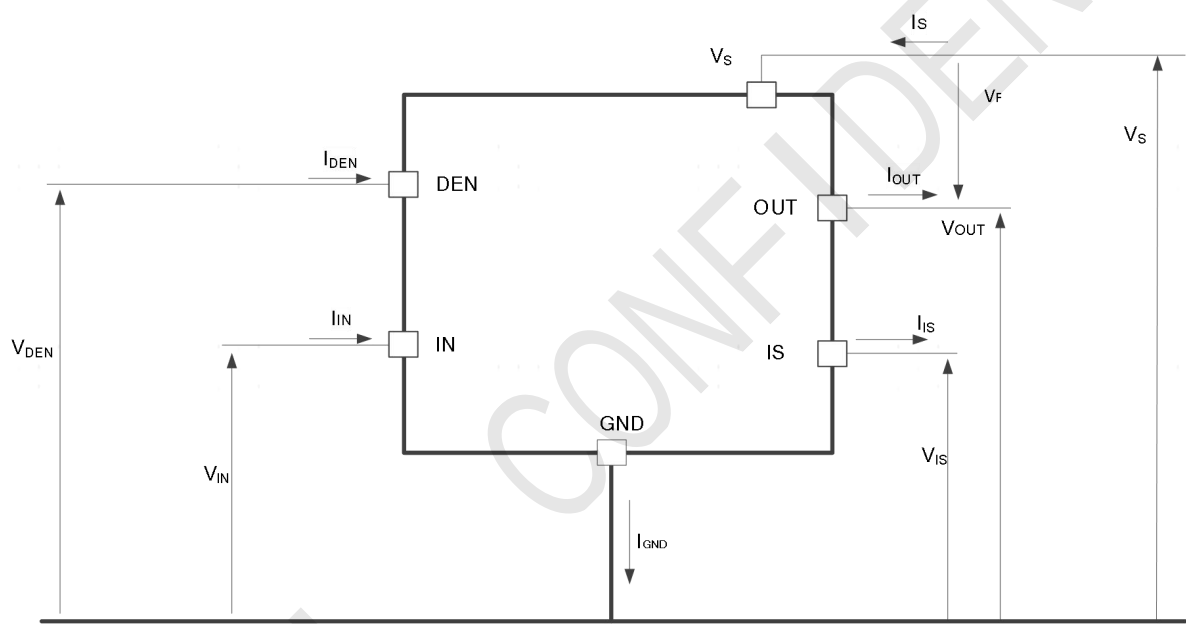

Note3: $V_F = V_{OUT} - V_S$ during reverse battery condition.

Absolute Maximum Ratings (Note4)

Symbol	Parameter	Value	Unit
V_s	Transient supply voltage	65	V
$-V_s$	Reverse DC supply voltage	0.3	V
$-I_{GND}$	DC reverse ground pin current	50	mA
I_{OUT}	OUT DC output current	Internally limited	A
V_{IN}, V_{DEN}	IN, DEN DC input voltage	-0.3 to 6.0	V
I_{IS}	IS pin DC output current	20	mA
	IS pin DC output current in reverse	-20	
T_j	Junction operating temperature	-40 to 150	°C
T_{stg}	Storage temperature	-55 to 150	

Note4: Stressing the device above the rating listed in Absolute maximum ratings may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the operating sections of this specification is not implied.

Exposure to the conditions in table below for extended periods may affect device reliability.

Thermal Resistance (Note5)

Symbol	Parameter	Value	Unit
T_{JC}	Thermal Resistance Junction-to-Case	1.3	°C/W
T_{JA}	Junction-to-Ambient Thermal Resistance	24	°C/W

Note5: According to JEDEC JESD51-2,-5,-7 at natural convection on FR4 2s2p board; the Product (Chip + Package) was simulated on a 76.2 × 114.3 × 1.5 mm board with 2 inner copper layers (2 × 70 μm Cu, 2 × 35 μm Cu). Where applicable a thermal via array under the exposed pad contacted the first inner copper layer.

ESD Susceptibility (Note6)

Symbol	Parameter	Values	Unit
$V_{ESD(HBM)}^{(3)}$	ESD Susceptibility all Pins (HBM)	± 2	kV
$V_{ESD(HBM)_{OUT}}$	ESD Susceptibility OUT vs GND and V_S connected (HBM)	± 4	kV
$V_{ESD(CDM)}^{(4)}$	ESD Susceptibility all Pins (CDM)	± 500	V
$V_{ESD(CDM)_{CRN}}$	ESD Susceptibility Corner Pins (CDM)	± 750	V

Note6:


- 1) Not subject to production test - specified by design.
- 2) Maximum digital input voltage to be considered for Latch-Up tests: 5.5 V.
- 3) ESD susceptibility, Human Body Model "HBM", according to AEC Q100-002.
- 4) ESD susceptibility, Charged Device Model "CDM", according to AEC Q100-011.

EAS Susceptibility (Note7)

Symbol	Parameter	Values			Unit	Note or Test Conditon
		Min.	Typ.	Max.		
E_{AS}	Maximum Energy Dissipation Single Pulse			300	mJ	$I_{OUT} = 13A$ $T_{J(0)} = 150\text{ }^{\circ}C$ $V_S = 48V$

Note7: Not subject to production test - specified by design.

Functional Block

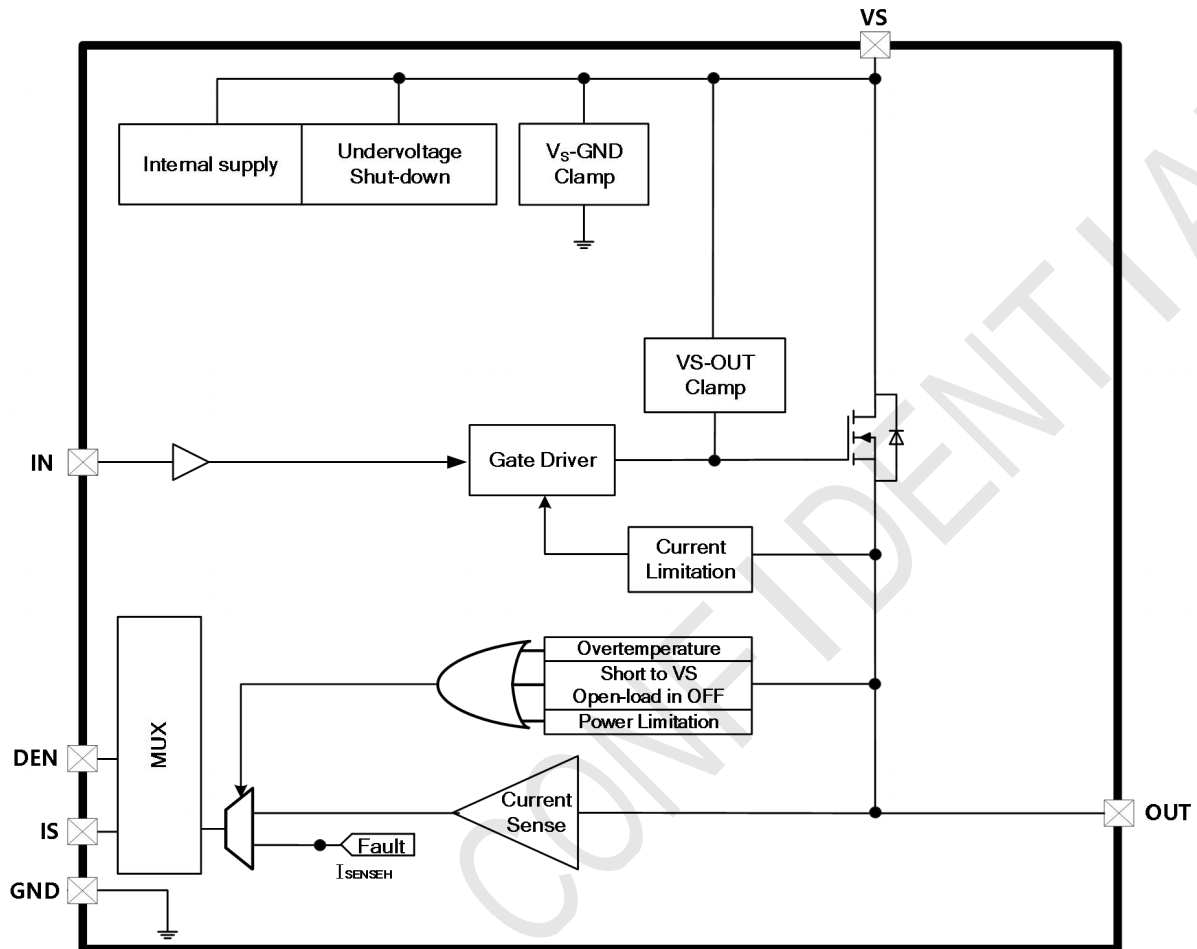

Electrical Characteristics (Note8), $5V < V_S < 58V$; $-40^{\circ}C < T_J < 150^{\circ}C$, unless otherwise specified**Power section**

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Nominal operating voltage	V_{NOM}		5	48	58	V
Under voltage shutdown	V_{USD}			3.5	4.5	V
Under voltage shutdown hysteresis	$V_{USDhyst}$			0.3		V
On-state resistance	R_{ON}	$I_{OUT}=5A, T_J = 25^{\circ}C$		8		mΩ
		$I_{OUT}=5A, T_J = 150^{\circ}C$			16	
		$I_{OUT}=5A, V_S=5V, T_J = 25^{\circ}C$			12	
Nominal load current	$I_{L(NOM)}$	$T_A=25^{\circ}C$		15		A
Nominal load current at $T_A=85^{\circ}C$	$I_{L(NOM)_85}$	$T_A=85^{\circ}C, T_J < 150^{\circ}C$		13		A
Inverse Current Capability	$I_{L(INV)}$	$V_S < V_{OUT}, V_{IN}=5V, T_A=25^{\circ}C$		12		A
V_S clamp voltage	V_{CLAMP}	$I_S=20\text{ mA}$	70	75		V
Supply current in sleep	I_{SLEEP}	$V_S=48V, V_{IN}=V_{OUT}=V_{DEN}=0V, T_J=25^{\circ}C$		5.0	10	μA
		$V_S=48V, V_{IN}=V_{OUT}=V_{DEN}=0V, T_J=125^{\circ}C$			25	μA
Sleepy mode blanking time	t_{D_SLEEP}	$V_S=48V, V_{IN}=V_{OUT}=0V$ $V_{DEN}=5V \text{ to } 0V$	150	400	800	us
Supply current in active	$I_{S(ACTIVE)}$	$V_S=48V, V_{DEN}=5V, V_{IN0,1}=0V,$		1.2	2.5	mA
Control stage current consumption in ON state	$I_{GND(ON)}$	$V_S=48V, V_{DEN}=5V, V_{IN0,1}=5V$		5.0	10	mA
Off-state output current	$I_{L(off)}$	$V_{IN}=V_{OUT}=0V, V_S=60V, T_J=25^{\circ}C$		10	20	μA
		$V_{IN}=V_{OUT}=0V, V_S=60V, T_J=125^{\circ}C$			50	μA
OUT - V_S diode voltage	V_F	$I_{OUT}=-2A, T_J=150^{\circ}C$			0.9	V

Switching

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Turn-on delay time at $T_J = 25^{\circ}C$	$T_{d(on)}$	$V_S=48V, V_{DEN}=5V, R_L=10\Omega$		20	60	us
Turn-off delay time at $T_J = 25^{\circ}C$	$T_{d(off)}$			30	100	us
Turn-on voltage slope at $T_J = 25^{\circ}C$	$(dV_{OUT}/dt)_{on}$	$V_S=48V, V_{DEN}=5V, R_L=10\Omega$	0.5	1.0	2.0	V/us
Turn-off voltage slope at $T_J = 25^{\circ}C$	$(dV_{OUT}/dt)_{off}$		0.5	1.5	3.0	
Differential pulse skew($t_{PHL} - t_{PLH}$)	t_{SKEW}	$V_S=48V, V_{DEN}=5V, R_L=10\Omega$	-50		50	us

Logic input (IN, DEN)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Logic input low level voltage	V_{LOW}				0.9	V
Low level logic input current	I_{LOW}	$V_{LOW}=0.9V$	2	11	35	uA
Logic input high level voltage	V_{HIGH}		2.1		6.0	V
High level logic input current	I_{HIGH}	$V_{HIGH}=2.0V$	1	10	32	uA


Logic input hysteresis voltage	$V_{(hyst)}$			0.2		V
Protections						
Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
DC short circuit current	I_{LIMH}	$12V < V_S < 58V$	40	50	60	A
Short circuit current during thermal cycling	I_{LIML}	$V_S=48V, V_{DEN}=5V, T_R < T_J < T_{TSD}$		10		
Shutdown temperature	T_{TSD}		150	175	200	$^{\circ}C$
Thermal hysteresis	T_{HYST}			20		$^{\circ}C$
Current limit reset temperature	T_R			135		$^{\circ}C$
Dynamic temperature	ΔT_{J_SD}	$T_J = -40^{\circ}C$		60		$^{\circ}C$
Turn-off output voltage clamp	V_{DEMG}	$I_{OUT}=1A, V_{DEN}=5V, L=3mH,$ $T_J = -40^{\circ}C \text{ to } 150^{\circ}C$	V_S-68	V_S-73		V
Current sense characteristics						
Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
I_{OUT}/I_{IS}	K_1	$I_{OUT}=0.5A, V_{DEN}=5V$	-5%	4800	+5%	
I_{OUT}/I_{IS}	K_2	$I_{OUT}=2A, V_{DEN}=5V$	-3%	5300	+3%	
I_{OUT}/I_{IS}	K_3	$I_{OUT}=4A, V_{DEN}=5V$	-3%	5300	+3%	
I_{OUT}/I_{IS}	K_4	$I_{OUT}=10A, V_{DEN}=5V$	-3%	5300	+3%	
K derating with temperature	ΔK		-2%	0	+2%	
Current sense leakage current	I_{IS0}	IS disabled: $V_{DEN}=0V$	0		1	μA
		IS enabled: $V_{DEN}=5V$, channel ON, $I_{OUT}=0A$		15		
Output voltage for IS shutdown	V_{OUT_MSD}	$V_{DEN}=5V, R_{SENSE}=3.9K, V_{IN}=5V;$ $I_{OUT}=6A$		5		V
Max analog sense output voltage	V_{IS}	$V_S=48V, V_{IS}=5V$	4.5			V
Current sense output current in fault condition	I_{ISH}	$V_S=48V, V_{IS}=5V$	10	20	30	mA
Current sense output voltage in fault condition	V_{ISH}	$V_S=48V, V_{IS}=5V$	5.4	6	6.6	V
OFF-state diagnostic						
Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
OFF-state open load voltage detection threshold	V_{OL}	$V_{DEN}=5V, V_{IN}=0V$	2	3.5	5	V
OFF-state output sink current	$I_{L(off2)}$	$V_S=48V, V_{IN}=0V, V_{OUT}=V_{OL},$ $T_J = -40^{\circ}C \text{ to } 150^{\circ}C$		-50		μA
OFF-state diagnostic delay time from falling edge of IN	t_{DSTKON}	$V_{DEN}=5V, V_{IN}=5V \text{ to } 0V, V_{OUT}=4V,$	150	400	800	μs
Settling time for valid OFF-state open load diagnostic indication from rising edge of DEN	$t_{D_OL_V}$	$V_{IN}=0V, V_{OUT}=4V, V_{DEN}=0V \text{ to } 5V$			150	μs

OFF-state diagnostic delay time from rising edge of V_{OUT}	t_{D_VOL}	$V_{DEN}=5V, V_{IN}=0V, V_{OUT}=0V$ to 4V		5	30	us
Current sense timings						
Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Current sense settling time from rising edge of DEN	$t_{DSENSE1H}$	$V_{IN}=5V, V_{DEN}=0V$ to 5V, $R_{SENSE}=1K, R_L=10\Omega$			100	us
Current sense disable delay time from falling edge of DEN	$t_{DSENSE1L}$	$V_{IN}=5V, V_{DEN}=5V$ to 0V, $R_{SENSE}=1K, R_L=10\Omega$		5	20	us
Current sense settling time from rising edge of IN	$t_{DSENSE2H}$	$V_{IN}=0V$ to 5V, $V_{DEN}=5V$, $R_{SENSE}=1K, R_L=10\Omega$		80	250	us
Current sense settling time from rising edge of I_{OUT} (dynamic response to a step change of I_{OUT})	$\Delta t_{DSENSE2H}$	$V_{IN}=5V, V_{DEN}=5V, R_{SENSE}=1K$, $I_{IS}=90\%$ of I_{IS_MAX} , $I_{OUT}=90\%$ of I_{OUTMAX} $R_L=10\Omega$			150	us
Current sense turn-off delay time from falling edge of IN	$t_{DSENSE2L}$	$V_{IN}=5V$ to 0V, $V_{DEN}=5V$, $R_{SENSE}=1K, R_L=10\Omega$		80	250	us


Note8: Except for the special test instructions, all electrical parameters are tested under $T_A = +25^\circ C$. The minimum and maximum specification range of the specifications is guaranteed by the test, and the typical values are guaranteed by the design, test, or statistical analysis.

Switching Status and Timing Relationship

Switching time and pulse skew

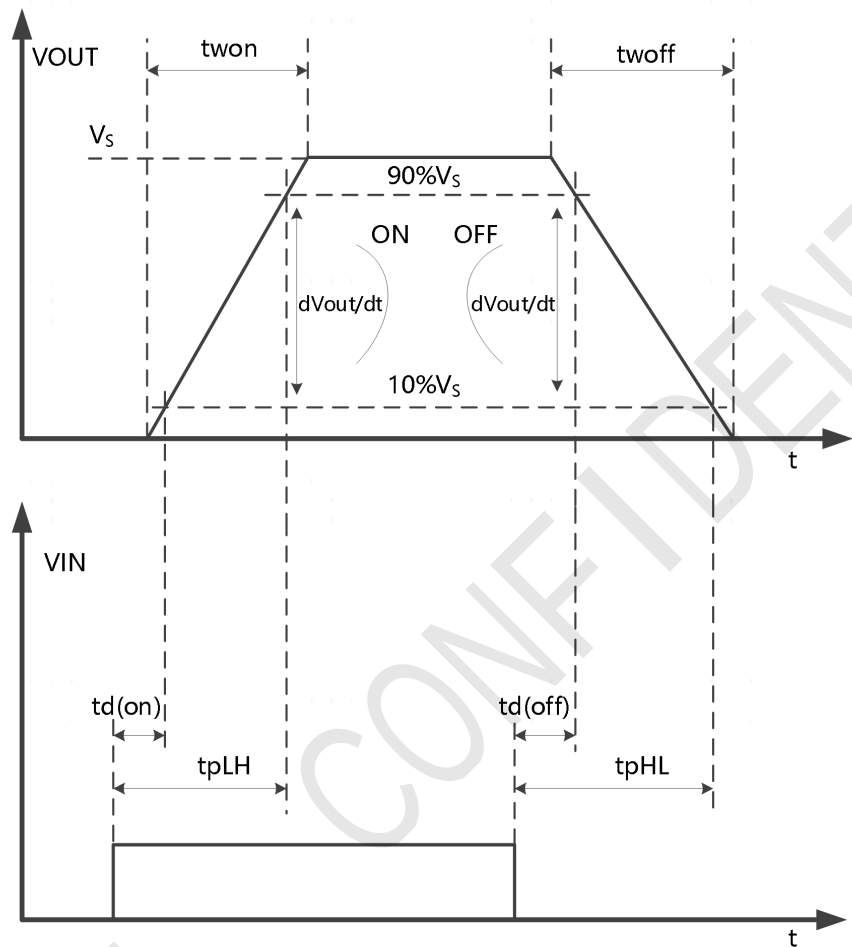

Current sense timings (current sense mode)

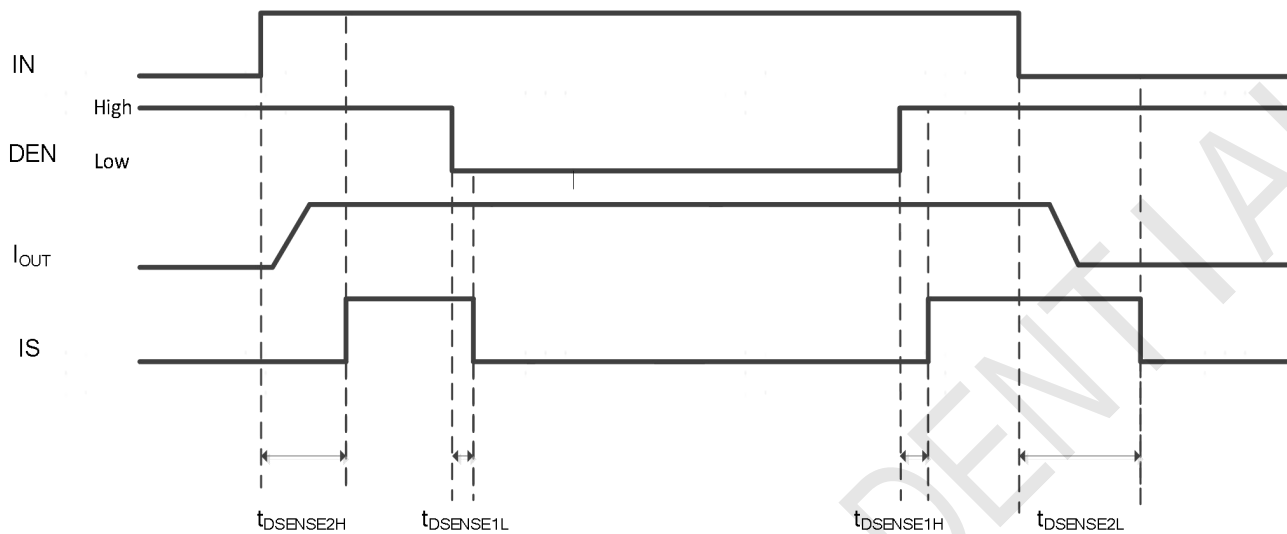

T_{DSTKON}

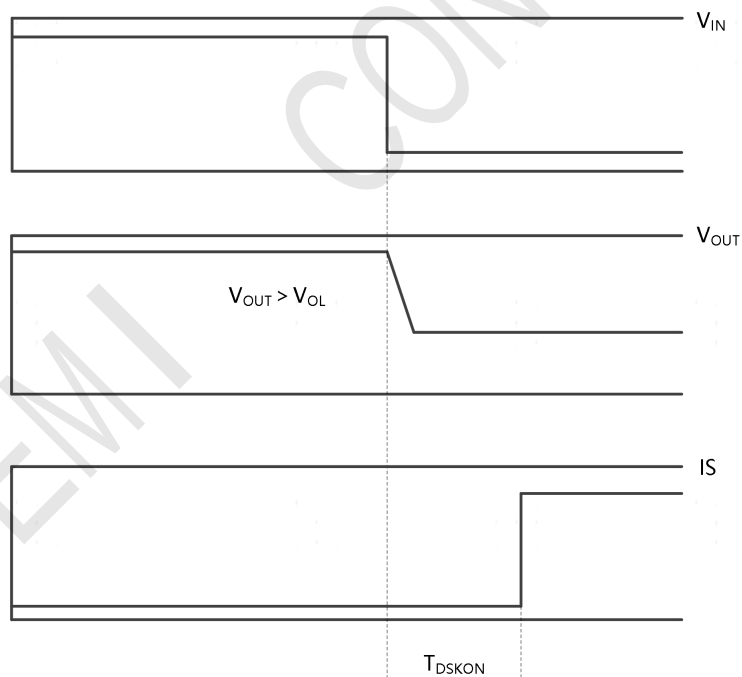


Table 2. Truth table



Conditions	IN	DEN	OUT	IS
Standby	L	L	L	0
Normal	L	H	L	0
	H	H	H	$I_{IS} = I_{OUT}/K$
Overload	H	H	H	I_{ISH}
OverTemperature	L	H	L	0
	H	H	L	I_{ISH}
Undervoltage	X	X	L	0
Short to V_S	L	H	H	I_{ISH}
	H	H	H	<Normal
Open-Load	L	H	H	I_{ISH}
Short circuit to GND	H	H	L	I_{ISH}

Table 3. Current sense output

DEN	MUX Channel	Current sense output			
		Normal	Overload	OFF-state	Negative output
L		Hi-Z			
H	Channel diagnostic	$I_{IS} = I_{OUT}/K$	$I_{IS} = I_{ISH}$	$I_{IS} = I_{ISH}$	Hi-Z

Package Outline

PLP7x4-6

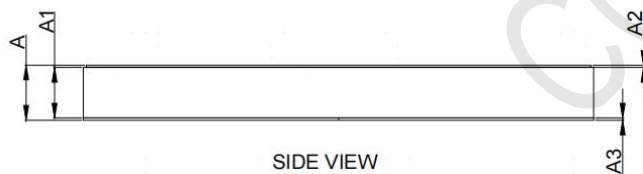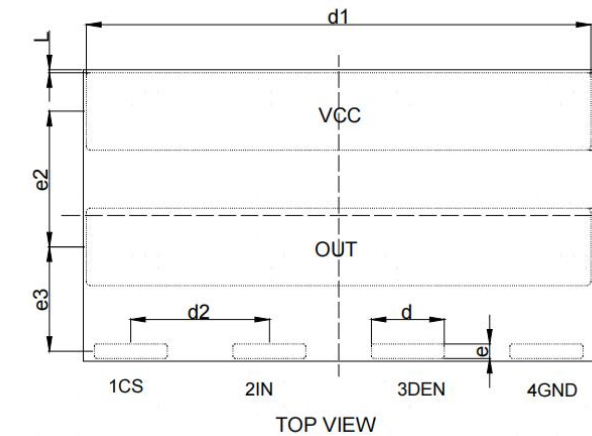

SYMBOL	ITEM		MIN	NOM	MAX
A	PACKAGE HEIGHT		0.700	0.750	0.800
A1	WAFER THICKNESS		0.657	0.690	0.723
A2	UBM THICKNESS	CU	0.015	0.020	0.025
		SN	0.007~0.020		
A3	BACKSIDE COATING THICKNESS		0.005~0.045		
D	PACKAGE SIZE X		6.975	7.000	7.025
E	PACKAGE SIZE Y		3.975	4.000	4.025
d	UBM SIZE X		0.990	1.000	1.010
e	UBM SIZE Y		0.190	0.200	0.210
d1	UBM SIZE X		6.910	6.920	6.930
e1	UBM SIZE Y		1.050	1.060	1.070
L	EDGE DISTANCE		0.040		
d2	UBM PITCH X		1.900		
e2	UBM PITCH Y		1.860		
e3	UBM PITCH Y		1.430		
---	UBM COUNT		6		
k	UBM space		0.800		

WST5008AK Product Description

High-side driver with current sense analog feedback for 48V automotive applications



CONTACT

Winsemi Microelectronics Co., Ltd.

ADD: Room 3101-3102, 31F, Building 8A, Shenzhen International Innovation Valley, Nanshan District, Shenzhen, P.R. China.

Post Code : 518040

Tel : 86-0755-82506288

Fax: 86-0755-82506299

Website : www.winsemi.com

CONFIDENTIAL